



STACK LEADFRAME/MAGAZINE LOADER

Features

- ❖ Applicable to various substrates, leadframes or carriers
- ❖ Applicable to handle magazine of various sizes
- ❖ 'Servo Control' lifting/traversing motion
- ❖ High speed and precise indexing
- ❖ Easy loading or unloading of magazines
- ❖ Stores up to 10 different types of magazine dimensions
- ❖ Operation selectable between magazine or stack
- ❖ User friendly touch screen panel
- ❖ Fast product change-over cycle
- ❖ SMEMA compatible



Plan View

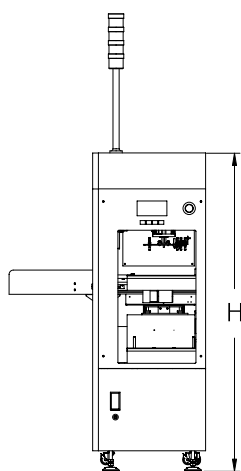

Front View



Legend
 △ : Fixed Point

SPECIFICATIONS

Description	This unit is used for loading of substrates, leadframes or carriers.
Magazine	Specify upon order
No. of Magazines	Depends on magazine type
Loading Time	Approx. 8 seconds
Magazine Change-over Time	Approx. 20 seconds
Indexing Pitch	1 - 4 (5mm pitch) or specify
Power Source	100, 230VAC 1Ph
Power Consumption	1000VA max
Air Pressure	4 - 6 bar
Air Consumption	15 ltr/min

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM4413LM	955 x 1120 x 1540	790 mm	340 kg