



STACK LOADER



Features

- ❖ Applicable to various leadframes and substrates
- ❖ 'Servo control' traversing motion
- ❖ High speed and precise indexing
- ❖ Adjustable picking position (using vacuum cup)
- ❖ Fast product change-over cycle
- ❖ SMEMA compatible

Legend
△ : Fixed Point

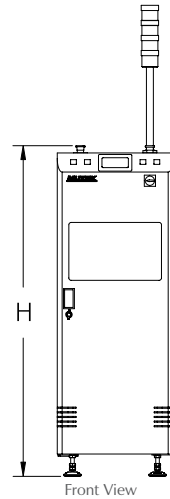

SPECIFICATIONS

Description	This unit is used for loading of leadframes and substrates.
Maximum Capacity	300 pieces (based on 0.3mm thickness)
Loading Time	15 seconds
Power Source	100, 230VAC 1Ph
Power Consumption	300VA max
Air Pressure	4 - 6 bar
Air Consumption	15 ltr/min

Size	Model No.	Machine Dimension (mm) L x W x H	Fixed Point to Front Dimension (X)	Weight (Approximately)
M	NTM4414LM	500 x 920 x 1430	473 mm	300 kg